


Кол.	Описание
1	UNOLIFT.270.AP35B.50.08.A  Забележка! Показаната снимка може да се различава от реалната. Продуктов номер: При запитване Wastewater collecting tank with a total volume of 270 liter. Incl. pipeset to assemble on site with one pump of type UNILIFT AP35B.50.08.A1 Effective pump volume per operation cycle from 31 up to 152 liter. Discharge performance of 1,2 to 6m³/h. Effective pump volume can be adjusted by controller setting. Large assembly and service inspection cover ø380mm, screwed. Connection ports: 1 x horizontal inlet DN100 with space saving inlet socket at a center height of 180mm 1 x horizontal inlet DN100 with space saving inlet socket at a center height of 520mm 1 x vertical inlet DN100 with space saving inlet socket (incl. 1 x DN100 socket sealing) 1 x DN40 connection mit space saving socket to connect e.g. a diaphragm pump (incl. 1x DN40 socket sealing) 1 x DN75/50 venting connection with PVC port (ø63), of PP-socket Muffe DN75 or possible to use a flexibler connecting piece DN75 Pre-assembled pipe clamps of sensor pressure tube DN50 delivered with a controller LC220/LC220 Tank according to EN12050-1 and -2 type tested and monitored by external institute. Note: "Assembly to a complete lifting station according to EN12050 requires pumps, non return valve, manual start option (part 1) and high water alarm as minimum incl. level sensing. These components are not part of the delivery Components delibvered to be assembled on site." Recommended controller LC220 or LC221.1 with up to 5 pre-set values of start/stop/alarm and incl. sensor pressure tube. Material: Collecting tank: Polythylen (PE) cover/lid: Polythylen (PE) Screws: Galvanized Steel Socket sealing: Styrene Butadiene (SBR) Piping parts: Polyvinyl Chloride (PVC) and Polypropylen (PP) Tank dimensions: l x w x h: 700x600x750 mm Weight: 36.6 kg

Кол.	Описание
	Течност: Работен флуид: Вода Максимална температура на течността: 40 °C Избрана температура на течността: 20 °C Плътност: 998.2 kg/m³ Технически: Тип на работното колело: Вихров(Vortex) Максимален размер на частиците: 35 mm Одобрено по CE (Да/Не): Y EN номер за LGA одобрение: 12050-2 Тип на вентила: НЯМА Електрич. данни: Тип на двигателя: PSC Входна мощност - P1: 1.25 kW Номинална мощност на вала на двигателя - P2: 0.8 kW Основна честота: 50 Hz Номинално напрежение: 1 x 220-240 V Толеранс напреж.: +6/-10 % Максимален брой стартове за час: 40 Номинален ток: 5.44 A Cos phi - коефициент на мощност: 0.98 Номинална скорост: 2795 rpm Размер на кондензатора - работен: 16 µF/400 V Брой на полюсите: 2 Стартов метод: директно Степен на защитеност (IEC 34-5): IP68 Изолационен клас (IEC 85): F Резервоар: Общ обем на резервоара(ите): 270 l Общ ефективен обем на събирателния резервоар при 180 мм входен отвор: 31 l Общ ефективен обем на събирателния резервоар при 250 мм входен отвор: 152 l Други: Нето тегло: 36.6 kg Брутна тежест: 46.3 kg

При запитване UNOLIFT.270.AP35B.50.08.A 50 Hz

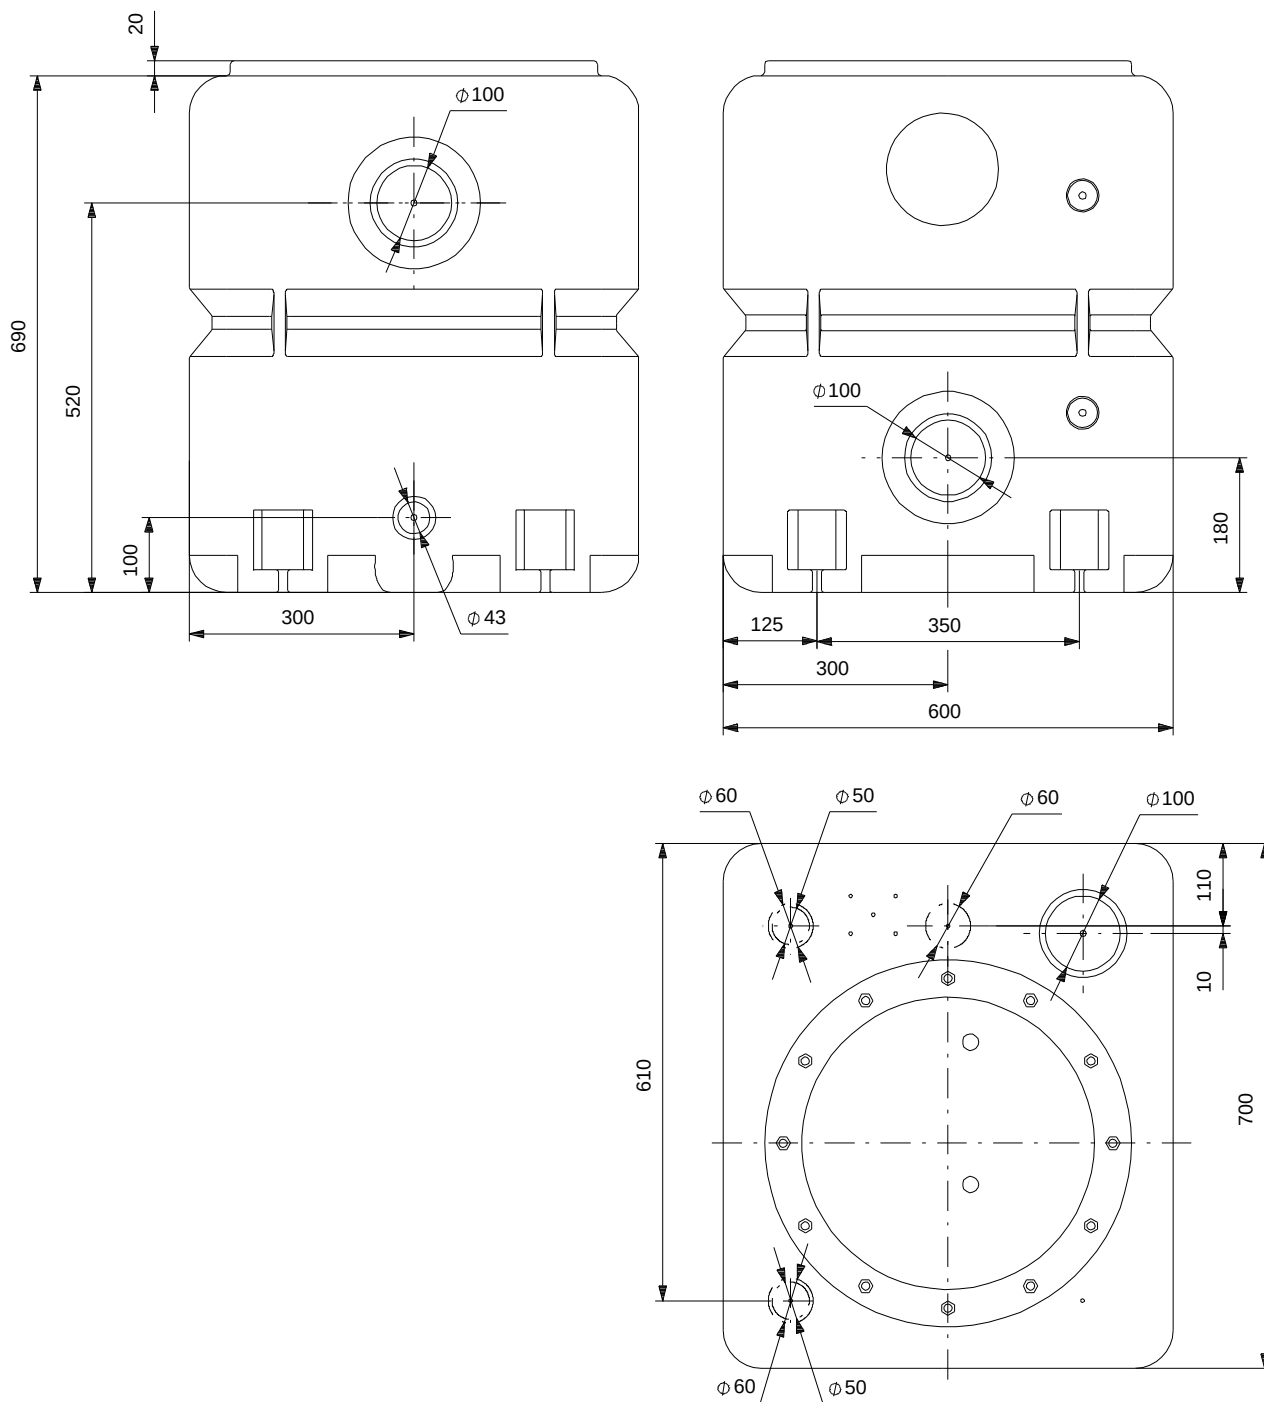

Забележка! Всички стойности са в [mm], освен ако е посочено друго.
Опровержение: Този опростен оразмерителен чертеж не показва всички детайли.